


269C™, S1809 and Subsequent  
Handbook of Maintenance Instructions  
CSP-C-10

**UNDER REVIEW**  
URF 19-1275 19.11.08 (VM)

**SHOP COPY**

RELEASED FOR PROD.  
DATE: 05/21/14 INT. *[signature]*

*Can we do  
HOLE?*

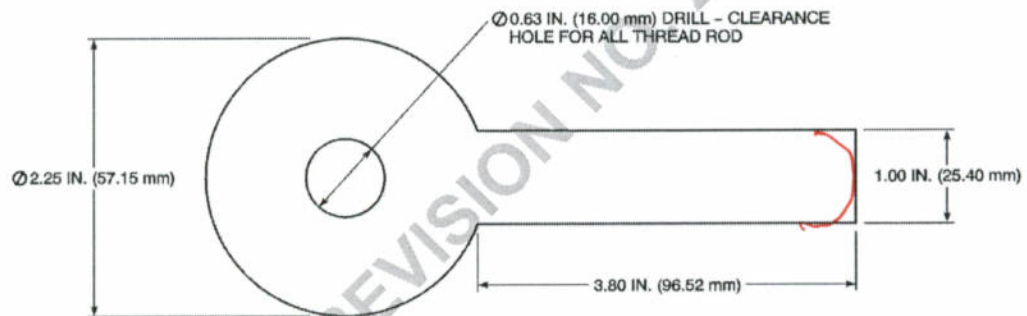

**NOTES**

1. MATERIAL: *6061* 2024 ALUM 0.75 IN. (19.05 mm) THK.
2. FINISH: BLACK ANODIZE - COMMERCIAL GRADE.
3. ALL DIMENSIONS +/- 0.01 IN. (0.25 mm) UNLESS OTHERWISE SPECIFIED.
4. DEBURR AND BREAK ALL SHARP EDGES.



**ARM-004 - ARM, INDICATOR REST**

LH0115  
SA

*1420*

Figure 5-7. Landing Gear Load Stroke Inspection Apparatus Components (Sheet 1 of 6)